


DIMENZIJE – TEHNIČNI LIST

HIDRAVLIČNA DVIŽNA POTEZNICA – 50/30min.480 fi 22/22

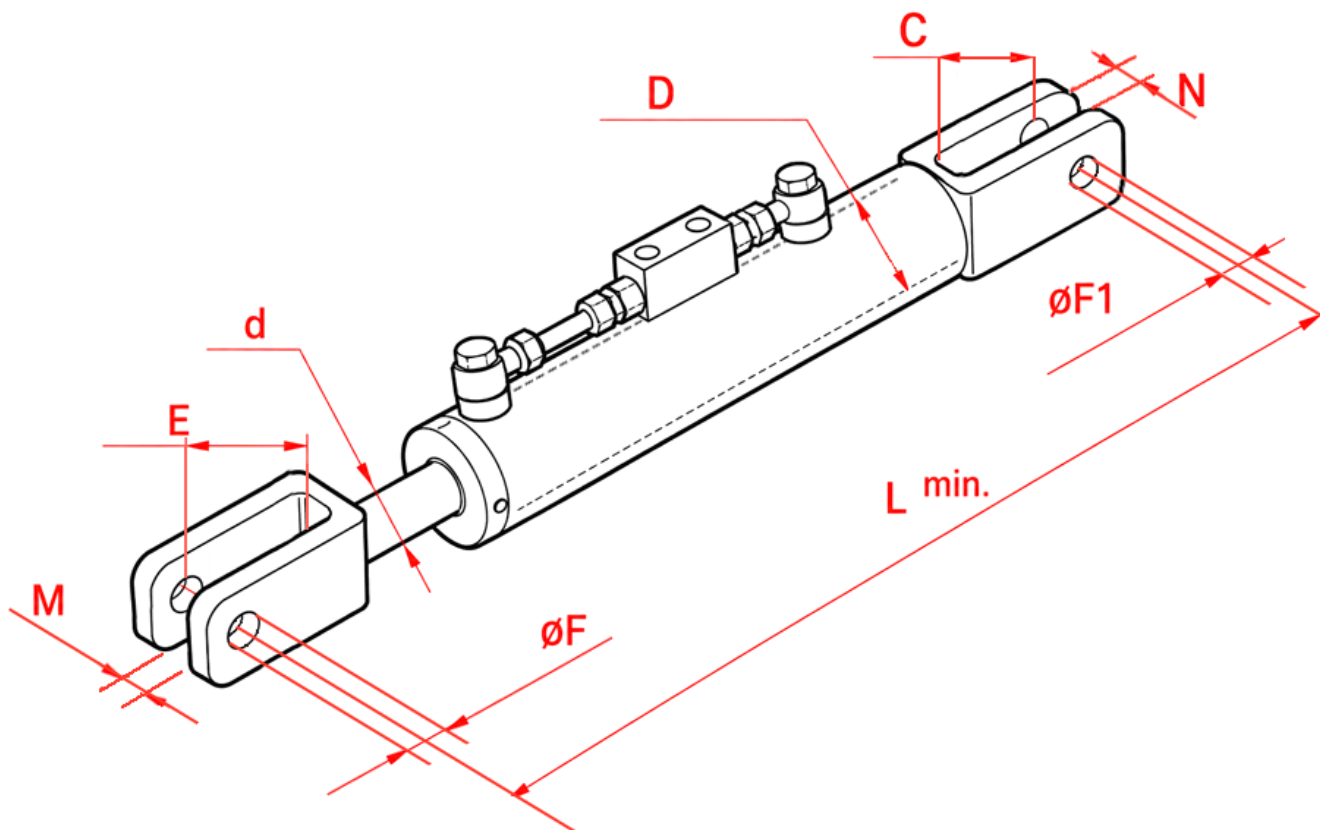

Notranja širina vilic "N":	38 mm
Notranja širina vilic "M":	26 mm
Razdalja med dnom cilindra in središčem luknje "C":	59 mm
Razdalja med notranjo stranjo vilic in središčem luknje "E":	98 mm
Premmer batnice "d":	30 mm
Maksimalni tlak:	250 bar
Blok ventil:	da
Teža izdelka:	7,43 kg
Notranji premer cilindra "D":	50 mm
Sila raztegovanja cilindra (pri 180 bar):	3,53 ton
Sila krčenja cilindra (pri 180 bar):	2,26 ton
Premmer luknje na batnici "F":	22 mm
Minimalna dolžina "Lmin":	480 mm
Premmer luknje na cilindru "F1":	22 mm
Hod cilindra:	160 mm
Zaščita:	barvan (barva črna)

Šifra	Znamka	Model
11663	FIAT-NEW HOLLAND	TK compatto

