


DIMENSIONS – TECHNICAL DATA SHEET**Mechanical top links with standard thread**

TOP LINK	CATEGORY	L	H	N	K	THREAD	D	MIN	MAX
KAT 1 M27X3 - 330/480	KAT 1	19,3		44		M27X3	220	330	480
KAT 1 M27X3 - 420/620	KAT 1	19,3		44		M27X3	320	420	620
KAT 1 M27X3 - 480/680	KAT 1	19,3		44		M27X3	370	480	680
KAT 1 M27X3 - 540/740	KAT 1	19,3		44		M27X3	430	540	740
KAT 1 M27X3 - 580/780	KAT 1	19,3		44		M27X3	470	580	780
KAT 1 M27X3 - 680/880	KAT 1	19,3		44		M27X3	575	680	880
KAT 1/2 M27X3 - 420/620	KAT 1/2	19,3	25,4	44	51	M27X3	320	420	620
KAT 1/2 M27X3 - 480/680	KAT 1/2	19,3	25,4	44	51	M27X3	370	480	680
KAT 1/2 M27X3 - 580/780	KAT 1/2	19,3	25,4	44	51	M27X3	470	580	780
KAT 2 M30X3 - 420/600	KAT 2	25,4		51		M30X3	295	420	600
KAT 2 M30X3 - 480/700	KAT 2	25,4		51		M30X3	360	480	700
KAT 2 M30X3 - 540/760	KAT 2	25,4		51		M30X3	430	540	760
KAT 2 M30X3 - 590/810	KAT 2	25,4		51		M30X3	470	590	810
KAT 2 M30X3 - 650/870	KAT 2	25,4		51		M30X3	530	650	870
KAT 2 M30X3 - 680/900	KAT 2	25,4		51		M30X3	560	680	900
KAT 2 M30X3 - 730/950	KAT 2	25,4		51		M30X3	610	730	950
KAT 2 M30X3 - 850/1070	KAT 2	25,4		51		M30X3	730	850	1070
KAT 3 M40X3 - 650/790	KAT 3	32		51		M40X3	500	650	790
KAT 3 M40X3 - 770/1090	KAT 3	32		51		M40X3	620	770	1090

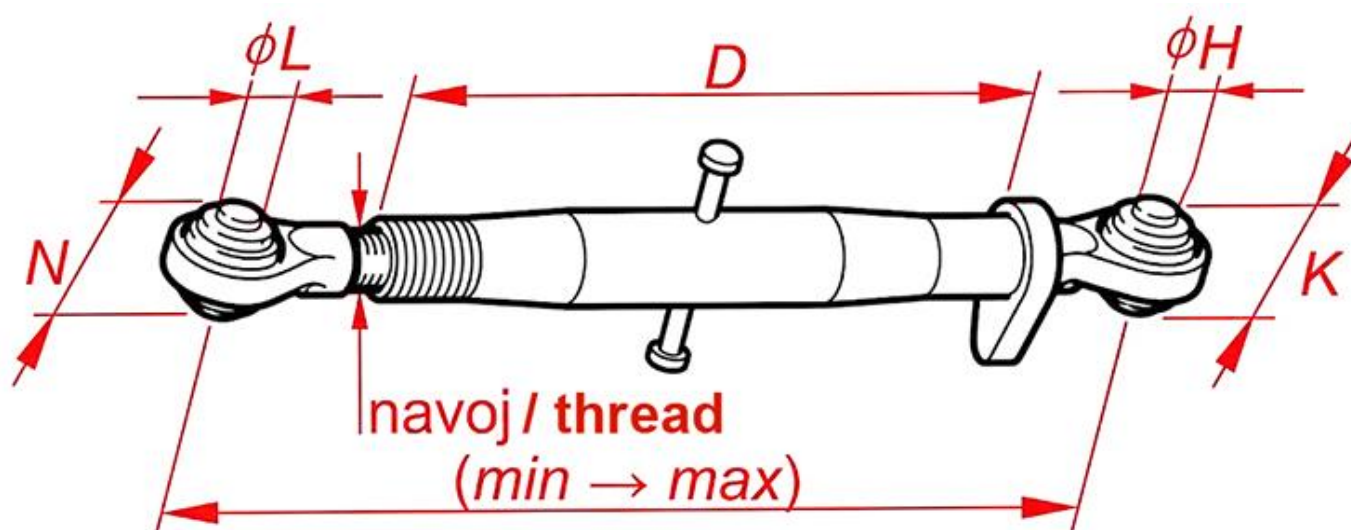